

Product leaflet

FilterBench

Dust extraction table



FilterBench

- ✓ Easy to use and always with extraction at hand
- ✓ Pre-filter (G4) and HEPA-filter (H13) included as standard
- ✓ Simple on/off push button control making the product easy to understand and operate
- ✓ Fan inverter included as standard making it possible to optimize air flow and minimize energy consumption
- ✓ Castors with swivel and brake included as standard making the product easy and safe to move and position

The FilterBench is a self-contained downdraft table and is available in three different sizes. The FilterBench is used for extraction and filtering of dust from materials like composite, plastic, fiberglass and wood arising from lighter processes such as sanding, de-burring, finishing, fettling, ingredient weighing etc. Easy to use and always with extraction at hand. The FilterBench should not be used in an environment with danger of explosions or for dust in explosive concentrations. The FilterBench should not be used for hot or spark generating processes such as welding fumes or metal grinding.


FilterBench


Certifications	CE
Filter efficiency (%)	99.9
Power Voltage (V)	230
Frequency (Hz)	50
No of phases	1
Electric plug	Euro (CEE 7/2 P+E)

Models

	Item no	Max airflow (m³/h)	Weight (kg)	Power (kW)	[ItemMounting]
	73003030	2300	230	0,5	
	73003029	2300	280	0,5	[mobile]
	73003031	4600	340	1	
	73003032	6900	470	1,5	

Accessories

	Accessory	Item no
	Plain rubber mat 740 × 300 × 5mm - sp	73000072
	Perforated rubber mat 740 × 770 × 5mm FB -sp	73000082
	Prefilter G4 for FilterBench	12376528
	Hepa Filter H13 for FilterBench	12376529

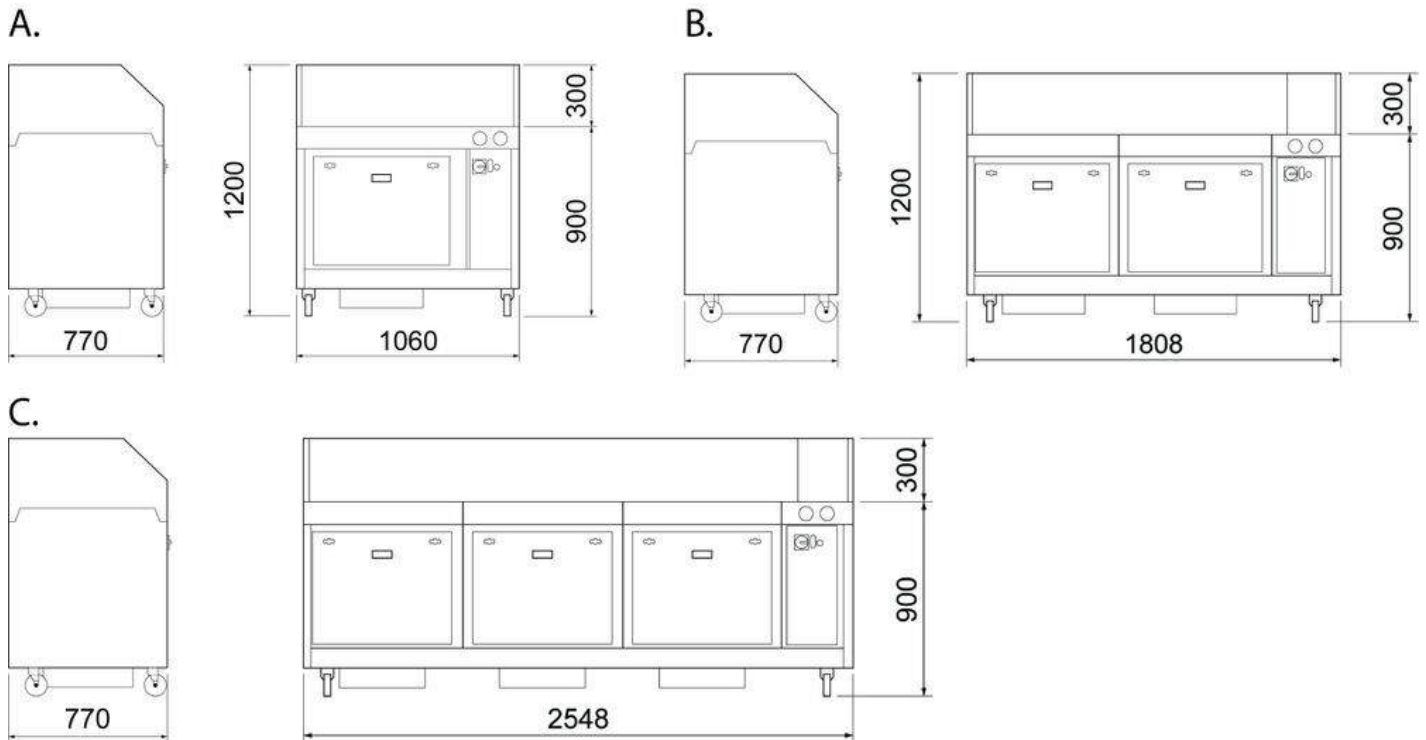

A: FilterBench 23 B: FilterBench 46 C: FilterBench 69



Functional description

